


TRF467SA

Transfer Tapes

Description

The TRF467SA is a transparent transfer tape with a good performance of anti-rebounding & anti-wrapping characteristics. This tape has a good temperature resistance and an excellent bonding strength to a variety of backing materials.

STRUCTURE

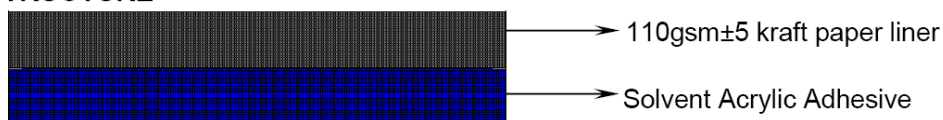

Applications

This tape has excellent adhesion to a wide range of substrates.

Carrier and Adhesive

Solvent acrylic adhesive
110 Gms. Kraft paper liner

Technical Details

PROPERTIES	VALUE
Thickness (Adhesive)	50 micron
Initial tack (Ball # 14)	<100mm
Peeling strength	> 8 N/25mm
Holding power @23°C	>1440 minutes
@80°C	>120 Minutes
Heating resistance short term	Up to 130 °C
Heating resistance long term	Up to 100 °C

Storage : Clean and dry in a well ventilated area, preferably at a temperature between 15°C and 25°C.

Disclaimer : The above information is given in good faith, but the user should insure himself that the performance of the product is sufficient for his application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. ATS All Tape Supplies cannot be held responsible for product failure unless full testing has been carried out. The client has to decide on the tapes suitability for their own applications.